


# SIMPLE & EASY

## Salt Level Detector SD-559

### LOW SALT LEVEL ALARM

Easy Installation, no tool needed.  
Simple and reliable

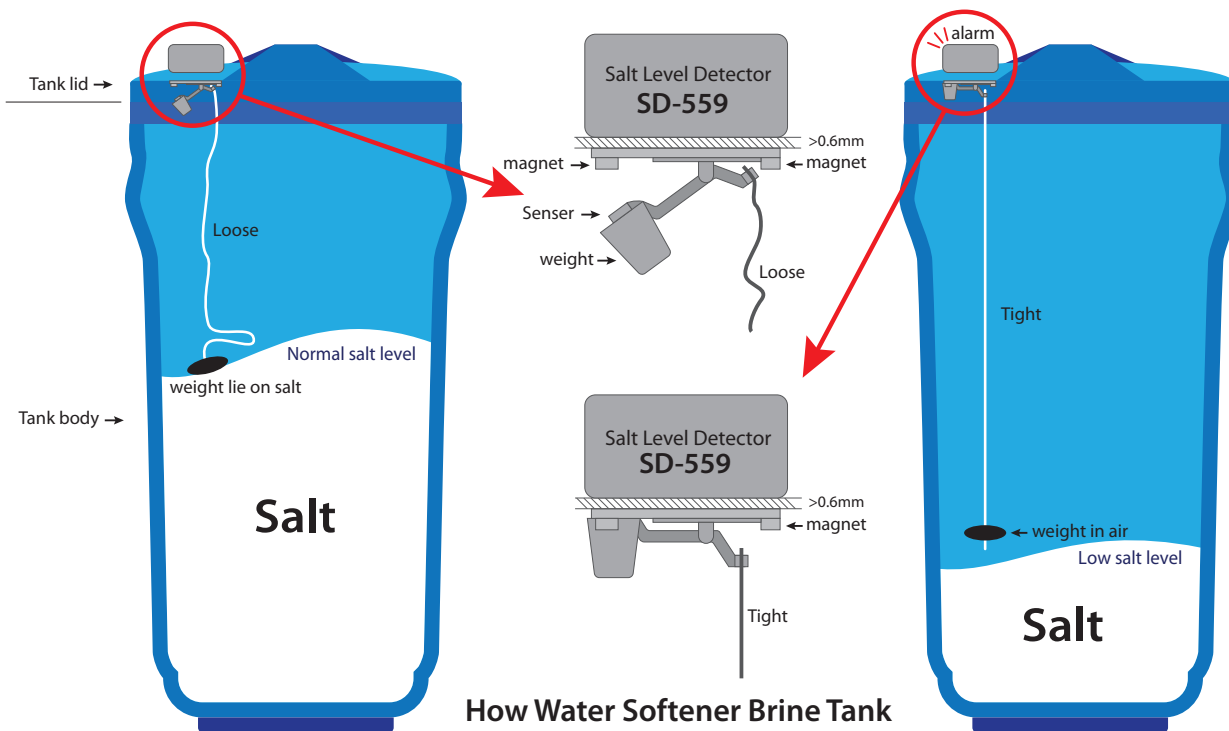

How Water Softener Brine Tank  
Salt Level Detector Work



# Salt Level Detector

## SD-559 Part List



## Install your Salt Level Detector SD-559

1. Tear off the double-sided tape, and fix the seesaw on the inside of the cover.

2. Adjust the height of the rubber ball.

3. Place the control box on top of the cover, the magnet will be attracted to the seesaw on the inside of the cover.

4. Normal salt level.

5. Low salt level, alert alarm starts.

Align control box and seesaw

Adjust ball height to the lowest limit of salt level

When the salt level is reaches the set limit, the weight will pull the seesaw down and trigger alarm

## Features



**Easy Installation, no tool needed.**  
**Simple and reliable**



**Battery-operated, power lasts more than one year**



**Real-time monitors salt level**



**Low salt level alarm**

## Specification

Battery	AA alkaline x 2
Alert Alarm	5 times every 15 minutes
72 hours Alarm Delay	Press button
Cord Length	120 cm
Weight	150 g
Dimension	70mm x 70mm x 38mm
Rubber Material	EPDM