Savant AS-414, Water Leak Blocker with Auto Shut Off Valve


SAVANT ELECTRONICS INC.

2088-3, Sec.1. Huanzhong road, Taichung 40761, Taiwan Tel: 886 4 2425 5578 Fax: 886 4 2425 0396

Email: savantco@ms65.hinet.net
Website: www.digisavant.com

Features:

- ☐ Auto shut off water when water leak is detected
- □ 9V alkaline battery operated
- ☐ Auto shut off when low battery power
- □ Easy installation
- □ Protection for water filter, water softener



Operating voltage: 9V DC (alkaline battery only)
Supply current: typical 1 mA, maximum 15 mA.
Cable length: 1.5 M for solenoid valve cord

Connecting: 1/2" BSP male


Water leak detecting method: Control unit with detecting metal put on the floor near water filter

Environment temperature : -20 ~ 80°C

Maximum Pressure: 6 Bar

Mechanism:




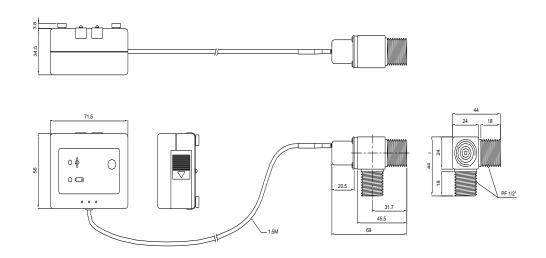

2.0 Operating instruction

2.1 Installation:

Install the proper fitting with the solenoid valve. The thread of solenoid valve is 1/2" BSP male. Then connect the inlet tube of the water treatment system with the solenoid valve.

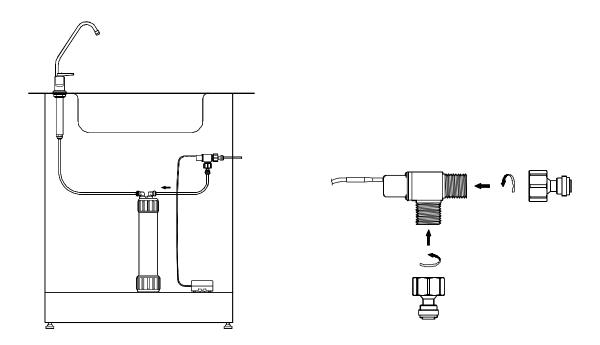

2.2 Operation

2.2.1 Reset to work

Keep pressing button for 4 seconds, the control unit activates solenoid valve to open the inlet tube of water treatment system, and generates a long beep sound.

2.2.2 Auto shut off when water leak is detected

The control unit shuts activate solenoid valve to shut off the inlet tube of the water treatment system to block water flow, and generates an acoustic signal, "beep-beep", and blinks the blue light continuously to notify the water leak is detected. After the leakage problem is solved, keep pressing button for 4 seconds, the control unit activates solenoid valve to open the inlet tube of water treatment system again with a long beep sound.

2.2.3 Low power shut off

When the battery power is low, the control unit shuts off the inlet tube of the water treatment system, blinks red light and generates an acoustic signal "beep" to notify that the battery needs to be replaced to keep water leak protection be functional.